

10/20/98
jc532 U.S. PTO

CROSBY, HEAFEY, ROACH & MAY
Four Embarcadero Center, 19th Floor,
San Francisco, CA 94111
(415) 543-8700

A

Honorable Commissioner of Patents
and Trademarks
Washington, D.C. 20231

Attorney's Docket No. 20864.00600

NEW APPLICATION TRANSMITTAL

SIR:

Transmitted herewith for filing is the patent application of Inventor(s): Richard Robert Schediwy and Federico Faggin

Title: FINGER/STYLUS TOUCH PAD

jc549 U.S. PTO
09/176639
10/20/98

CERTIFICATION UNDER 37 CFR §1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date October 20, 1998 an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EM500426256 US addressed to: Patent Application, Commissioner, U.S. Patent and Trademark Office, 2011 Jefferson Davis Hwy, Washington DC 20231-0002.

Judith Cotham
(Name of person mailing paper)

Judith Cotham
Signature

Enclosed are:

- 1. The papers required for filing date under CFR §1.53(b):
 - 16 Pages of specification (including claims);
 - 8 Sheets of drawings.
 - X formal
 - informal
- 2. X Declaration or oath (unsigned)
- 3. X Power of Attorney (unsigned)
- 4. Assignment of the invention to:
- 5. Fee Calculation
Amendment changing number of claims or deleting multiple dependencies is enclosed.

CLAIMS AS FILED

	Number filed	Number extra	Rate	Basic Fee
				\$790
Total Claims	12	* X \$22.00		
Independent Claims	1	* X \$82.00		
<u> </u> Multiple dependent claim(s), if any		\$270.00		

*If less than zero, enter "0".

Filing Fee Calculation. \$790

6. Small Entity Statement - verified statement enclosed

50% Filing Fee Reduction (if applicable). . \$

7. Other Fees

 Recording Assignment [\$40.00] \$

Total Fees Enclosed \$ 0.00

8. Payment of Fees

☐ Check(s) in the amount of \$ _____ enclosed.

☒ Charge Account No. 03-3821 in the amount of \$ 790.00 . **A duplicate of this transmittal is attached.**


9. ☒ Authorization to Charge Additional Fees

The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR §1.16 or §1.17 to Account No. 03-3821. **A duplicate sheet is attached.**

10. ☐ Information Disclosure Statement

11. ☒ Return Receipt Postcard

12. ☐ Other: Specify _____

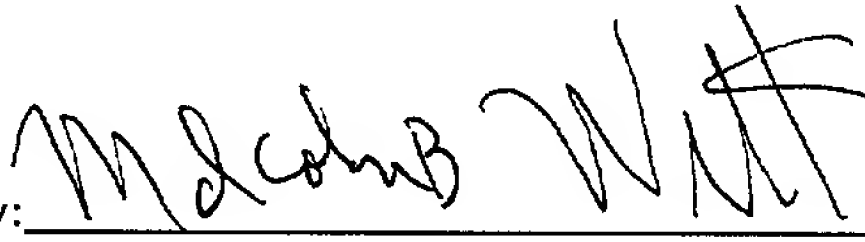By: 

Name: Malcolm B. Wittenberg

Registration No. 27,028

Dated 10/20/98

0916639 102098

FINGER/STYLUS TOUCH PAD

Technical Field of the Invention

The present invention involves a touch pad module for use with an electronic device, such as a notebook computer, which makes use of such modules to implement user input functions. The touch pad module is configured of certain insulative and conductive layers as to enable the electronic device to sense input data from both finger and stylus.

Background of the Invention

Over the last several years, capacitive touch pad pointing devices have entered widespread use in personal computers. There are at least three distinct capacitive sensing technologies used in touch pad devices today:

1. The "Field Distortion" approach, used by Cirque and Alps as described in PCT Application No. US90/04584, Publication No. WO91/03039 to Gerpheide. Specifically, Gerpheide teaches the application of an oscillating potential of a given frequency and phase to all electrodes on one side of a virtual dipole, and an oscillating potential of the same frequency and opposite phase to those on the other side. Electronic circuits develop a "balanced signal" which is zero when no finger is present, and which has the polarity of a finger on one side of the center of the virtual dipole, and the opposite polarity of the finger on the opposite side. To characterize the position of the finger initially, the virtual dipole is scanned sequentially across the tablet. Once the finger is located, it is "tracked" by moving the virtual dipole toward the finger once the finger has moved more than a row or column of the matrix constituting the capacitive sensor touch pad. Because the virtual dipole method operates by generating a balance signal that is zero when the capacitance does not vary with distance, it only senses the perimeter of the finger contact area, rather than the entire contact area.

0

2. The charge-detection approach used by the present assignee described in its U.S. Patent No. 5,374,787 to Miller et al. Specifically, the present assignee employs what is called a "finger pointer" technique. This approach is to provide a position sensing system including a position sensing transducer comprising a touch-sensitive surface disposed on a substrate, such as a printed circuit board, including a matrix of conductive lines. A first set of conductive lines runs in a first direction and is insulated from the a second set of conductive lines running in a second direction generally perpendicular to the first direction. An insulating layer is disposed over the first and second sets of conductive lines. The insulative layer is thin enough to promote significant capacitive coupling between a finger placed on its surface and the first and second sets of conductive lines. Sensing electrodes respond to the proximity of a finger to translate the capacitance changes of the conductors caused by the finger proximity into position and touch pressure information.

5

10

15

3. An unrelated approach employed currently by Logitech.

20 All three of these technologies share an important common feature: The finger is detected by a plurality of horizontally-aligned sensor electrodes disposed on a first layer, separated by an insulator from a plurality of vertically-aligned sensor electrodes disposed on a second layer. Such sensor electrodes are often formed as, but are not limited to, standard copper printed circuit board traces.

25

An example of such an electrode arrangement is shown in Fig. 1. Specifically, reference is made to Figs. 1A through D, top, bottom, composite and cross-sectional views, respectively. Sensor array 10 is provided comprising substrate 12 including a set of first conductive traces 14 disposed on top of surface 16 thereof and run in a first direction to comprise row positions of sensor array 10. The set of second conductive traces 18 are disposed on a bottom surface 20 thereof and run in a second direction

30

preferably orthogonal to the first direction to form the column positions of the sensor array 10. The set of first and second conductive traces 14 and 18 are alternately in contact with periodic sense pads 22 comprising enlarged areas, shown as diamonds in Figs. 1A-1C. While sense pads 22 are shown as diamonds in Figs. 1A-1C, any shapes such as circles, which allows close packing the sense pads 22 is equivalent for purposes of this discussion.

It is well recognized that capacitive touch pads, such as those described above, work well with fingers, but are normally unable to sense a pen or stylus. Capacitive touch pads are typically used as pointing devices. Resistive touch pads work well with pens, but require an uncomfortable amount of pressure when used with fingers. Resistive touch pads are typically used as writing or drawing input devices. To date, there has not been a practical touch pad which would work well with both fingers and pens along with a single input device to serve both functions. Such a touch pad would be especially valuable in portable applications where space is at a premium.

It is thus an object of the present invention to provide an input device in the form of a touch pad module which will accept both finger and stylus input, that is, having the desirable attributes of both a capacitive touch pad for finer input and a resistive touch pad for stylus input in the same module.

This and further objects will be more readily apparent when considering the following disclosure and appended claims.

Summary of the Invention

The present invention is directed to a touch pad module to implement user input functions to an electronic device. The module comprises a sensor layer having a length and width for detecting position of a conductive object in contact with a touch pad module. An insulative layer is positioned over and contiguous with the sensor layer and a moderately conductive layer is positioned over and contiguous with the insulative layer to provide a touch pad module which can be used as both capacitive and resistive elements have been

employed in the past to receive input information from both a finger conductive stylus.

Brief Description of the Drawings

Figs. 1A through 1D are top plan and side views of capacitive touch pads of the prior art.

Figs. 2A and B show, in perspective, the effect of a finger contacting a capacitive touch pad module and a graph illustrating capacitance versus horizontal position on the pad.

Figs. 3A and B show a depiction, in plan view, and in graphical form, of the measurement of finger capacitance in one dimension and the capacitance of various electrodes based upon finger pressure.

Figs. 4A and B show, in perspective, and in graphical form, the effect of a stylus on a capacitive touch pad module and the capacitance generated as a result.

Figs. 5A and B are similar to the depictions shown in Figs. 4A and B with the contact area of the stylus enlarged.

Figs. 6A and B show, in perspective, a stylus used in conjunction with the touch pad module of the present invention and a capacitance graph generated as a result.

Figs. 7A and B illustrate in perspective, and in graphical form, the results of the application of a stylus to a touch pad wherein the conductance of its top surface is too high.

Figs. 8A and B illustrate in perspective, and in graphical form, the results of the application of a stylus to a touch pad wherein the conductance of its top surface is too low.

0 Figs. 9A and B are similar to Figs. 8A and B with a finger employed in place of the conductive stylus.

5 Figs. 10A and B are again similar to Figs. 8A and B showing the boundary effects of the conductive stylus contacting the touch pad module of the present invention near its periphery.

10 Fig. 11 is the touch pad module of the present invention in perspective showing the embodiment of providing the user with visual feedback created by the application of suitable stylus.

15 Fig. 12 is a graph of capacitance versus time showing the distinguishing characteristics between the use of stylus and finger in discriminating these two objects in providing positional input data to a suitable electronic device in using the present invention.

Detailed Description of the Invention

20 The present invention involves a touch pad module for use with an electronic apparatus which makes use of such a module to implement all or part of its user input functions. Notebook and desktop computers as well as copiers are typical examples of such electronic apparatus having need for a touch pad device such as that disclosed herein. When used in conjunction with a computer, a touch pad allows the user to manipulate a graphics cursor on a CRT display or allows a user to manipulate a stylus thereby allowing input of written text. The touch pad comprises a sensitive planar surface and a means for detecting the position of an object, such as a finger or stylus, near or in contact with the sensitive planar surface. The touch pad continuously communicates this position information to the electronic apparatus typically at a rate of from 40 to 100 Hz.

30 As noted previously, the touch pad module of the present invention can be used to implement user input functions to an electronic device through the use of both the finger of a user as well as through the use of a conductive

0 stylus held by the user. Fig. 2 shows the effect of a finger on a sensor of the
prior art, that is, capacitive sensor intended to accept positional data by the
application of a fingertip to the touch pad module. Above the electrodes 202 is
an insulating layer 201 which provides the surface 203 over which the finger
204 is detected (see Fig. 2A). In operation, each electrode on electrode layer
5 202 provides one plate of a capacitor and the finger 204, if present, provides a
second plate, with the insulating layer 201 forming the dielectric between
them. The conductance of the human body, combined with the human body's
inherent capacitance to free space, causes the finger to appear to be
electrically grounded in terms of its capacitance to the electrodes. Sensing
10 electrodes scan the array of electrodes for increased capacitance to ground
caused by the presence of a finger or other object over them. By measuring
the capacitance on both the horizontal and the vertical electrodes, the location
of the finger can be determined.

15 Fig. 2B shows a graph of capacitance versus horizontal position on the
pad. The capacitance is proportional to the finger's circular area of contact.
Hence, the capacitance is highest near the center of the finger and tapers off
toward the edge of the region of contact. Away from the finger, the
capacitance is essentially zero, i.e., unaffected by the finger. Touch pads
20 measure the finger position by locating the peak 206 of the curve 205 in Fig.
2B.

25 The position of the finger can be determined much more accurately than
the distance between the electrodes if the finger is wide enough to provide a
measurable signal on more than one of the electrodes in each of the horizontal
and vertical dimensions. Fig. 3 shows the effects of fingers of various sizes on
the electrode matrix. For simplicity, electrode grid 351 is shown in just the
horizontal dimension, and the electrodes are shown as linear wires when, in
fact, a more complex pattern such as linear strings of diamond shapes may be
30 preferred in practice. The finger (not shown) makes an approximately circular
area of contact with the surface. This circular region 352 is typically large
enough to cover several adjacent electrodes. The capacitance on an electrode
is proportional to the area of the electrode that is covered by the finger. This

0 area of overlap is largest near the center of the finger, and tapers off toward
the edge of the finger contact region. Fig. 3B shows graph 355 of the
capacitances of the various electrodes. The capacitance 356 of the electrode
5 nearest the center of the finger is highest because that electrode has the
greatest overlap with the finger. Because the finger is large compared to the
electrode spacing, the adjacent electrodes sense a reduced but non-zero
capacitance. The relative magnitudes of the detected capacitances on the
nearby electrodes can be used to determine the position of the finger
accurately with sub-electrode resolution. One popular method computes the
centroid of the entire curve 355; another method finds the electrode with
10 maximum capacitance and interpolates using a quadratic fit to the adjacent
electrode readings.

If finger 353 is narrower than the distance between electrodes, then it
may produce a signal on just one electrode 357 and high-resolution
15 interpolation is impossible. If the finger 354 is extremely narrow, it may fall
entirely between electrodes and not register at all as shown at 358.
Fortunately, real fingers are wide enough to allow for good interpolation with a
touch pad having a feasible number of electrodes (e.g., 15 electrodes in each
dimension).

20 To use a stylus with such a capacitive sensing touch pad, the stylus
must have certain special properties. First, the stylus must be conductive so
as to form the required second plate of detectable capacitance. The
conductive stylus is grounded either by direct contact with the skin of the
effectively grounded human, or by capacitive coupling to the human. Suitable
25 materials for the stylus include metals, and highly conductive plastics such as
nylon loaded with carbon fibers or carbon powder.

30 Second, the stylus must form a large enough signal on at least two
adjacent traces in each dimension to allow for accurate position measurement.
Traditional stylus designs feature a pointed tip which is not large enough to
form a signal on more than one trace, as shown in Fig. 4. Stylus 301 has such

0 a small contact area 302 that the resulting capacitance signal 303 is both too
narrow and too low in amplitude for effective position measurement.

5 Several designs for a wide stylus have been attempted. For example, a
ball of conductive foam may be attached to the end of the stylus, or a small
circular plate of metal can be attached by a ball joint to the tip. Fig. 5
illustrates the latter design. Stylus 401 is tipped with plate 402, whose area
has been chosen to mimic the contact area of a typical finger. Hence, the
capacitive signal 403 created by the plate on the electrodes is a good
10 simulation of the signal produced by a true finger (compare curve 403 to curve
205 of Fig. 2). Stylus designs of this kind have been built and shown to work,
but they are too clumsy, bulky and fragile to gain wide acceptance among
users.

15 For these reasons, the great majority of pen-actuated touch pads
currently manufactured use resistive, not capacitive, sensors. In a resistive
touch pad, pressure from the finger or stylus pushes a flexible conductive
membrane against another conductive surface and thereby detects a
measurable electrical signal. The resistive touch pad works well with a pointed
stylus, but because it requires actual pressure, the resistive pad is
20 uncomfortable to use with a finger. Also, the large contact area of a finger
reduces the accuracy of a resistive pad. Finally, because the resistive touch
pad contains moving parts, it is more fragile than a capacitive touch pad.
Hence, a capacitive touch pad that could work with a point-tipped stylus would
be of considerable value in the marketplace.

25 As noted previously, the present invention involves placing a moderately
conductive layer above the insulating layer, so that the grounded conductive
stylus makes contact with the moderately conductive layer. The conductive
layer effectively spreads out the ground image of the tip of the stylus, forming
30 a larger second capacitor plate which can be sensed by more than one
electrode on each of the horizontal and vertical axes.

0 In Fig. 6, electrode 503 and insulating layer 502 have been covered by
moderately conductive layer 501. Layer 501 is made from a conductive
material durable enough to be exposed as the surface of the touch pad with no
protective coating. A suitable material for this purpose is conductive carbon
5 powder in a plastic carrier material such as epoxy. A conductive stylus 504 is
then touched to the surface. Because stylus 504 is held by the human, the
stylus is effectively grounded as previously disclosed. The tip of stylus 504
makes electrical contact with conductive layer 501, causing a grounded region
10 505 to form on the conductive layer. Because layer 501 is only moderately
conductive, the grounding effect dissipates with distance from the point of
contact with the stylus. A sensing circuit which measures capacitance to
ground will measure a strong signal in region 505, but little or no signal far
away from region 505 and the stylus tip.

15 By controlling the conductivity of layer 501, the perceived image size of
the tip of the stylus can be adjusted to provide sufficient signal on an
appropriate number of electrodes. This permits the stylus 504 to be formed in
any convenient size and shape, such as that of a familiar fine-tipped pen.

20 If the conductive layer is too conductive, then the image will be very
large, possibly even covering the entire surface of the touch pad. In this case
it may not be possible to determine the location of the stylus by measuring the
capacitance on each electrode. In Figure 7, layer 601 has such high
conductance (i.e., such low resistance) that stylus 602 creates a grounded
region 603 that covers a large fraction of the surface. Hence, the capacitance
25 graph 604 is so wide that it is hard to measure the peak of the curve
accurately. In the extreme case of a highly conductive layer 601, contact with
a stylus anywhere on the surface would produce a uniform grounding effect
over the entire surface and no position information could be gained..

30 If the conductive layer is not conductive enough, then the image will not
be much larger than the tip of the stylus, and it may not be possible to
determine the location of the stylus to a resolution any higher than the
electrode pitch. In Figure 8, layer 701 has such low conductance (i.e., such

high resistance) that grounded region 703 is very small, producing a graph 704 which is not much better than graph 303 with no conductive layer at all.

For best operation, the conductivity of the surface layer should be chosen such that the image of the stylus is about the same size as the image generated by a finger on a normal capacitive sensor (note the similarity of capacitance graphs 205 of Figure 2 and 506 of Figure 6).

A key benefit of the present invention is that the touch pad can still be used effectively with a finger, as well as with a stylus as previously disclosed.

The fundamental mechanism of the capacitive touch pad as described above continues to detect fingers on touch pads with the additional conductive layer. In Figure 9, finger 802 touches the surface and produces a grounded region 803 which is larger than the image of a finger on a normal touch pad, but not so large as to render the resulting capacitance graph 804 unusable for calculating the finger position.

Thus, the addition of a conductive layer 801 allows the touch pad to work well with either a stylus or a finger.

It was determined that when the stylus or finger nears the edge of the sensor, the present invention can cause a noticeable distortion in the measured position. Referring to Figure 10, stylus 902 being close to edge 904 of the sensor, causes grounded region 903 to be truncated into a semicircular shape. The resulting capacitance graph shows a truncated and lop-sided curve as seen in Figure 10B. The true peak of the curve, and thus the true stylus position, is shown by arrow 906. The centroid method, if employed, will calculate a different position 905 because the curve is truncated on one side. The simplest solution to the boundary distortion effect is to make the touch pad somewhat larger than needed, then to cover the sensor with a bezel with a smaller opening that prevents the finger or stylus from nearing the true edge of the sensor.

Another solution is to compensate for the distortion in later processing on the computed position data. This is possible because the effect of the distortion is predictable and repeatable, especially if the conductance of layer 901 is a well-controlled manufacturing variable. To compensate for the distortion, a stylus is placed at various positions across the sensor, and the corresponding measured positions tabulated. The resulting table describes a mathematical function. It is easy to see that the effect shown in Figure 10 produces a monotonic distortion in the measured position, which means the tabulated function has an inverse which can be computed by means well known in the art. The distortion is compensated by applying this inverse function to each measured position during operation of the touch pad.

By choosing appropriate materials for the stylus tip and touch pad surface, the stylus can be made to leave a mark on the surface of the touch pad, giving a visual feedback to the user. In Figure 11, the touch pad is made of the same electrode layer 1003, insulating layer 1002, and conductive layer 1001, but conductive layer 1001 is made of a material whose properties cause stylus 1004 to leave a visible trail 1005 on the surface. The material may be pliant so that the stylus leaves a groove, or have other mechanical or chemical properties that cause the stylus to leave a mark. Or, the stylus can be made of a sacrificial material such as pencil graphite which leaves a trail when moved across the surface. With an appropriate surface material, the markings can be easily wiped off so that subsequent marks are more easily visible.

It is possible to make materials which are both conductive and transparent to visible light. In this case, layer 1001 may be made transparent and layer 1002 may be made of a material which changes color or reflectivity when mechanically disturbed. In yet another approach, all three layers 1001, 1002, and 1003 may be made transparent, and the whole assembly placed over a display screen such as a liquid crystal display (LCD) which can provide visual feedback under software control.

In some applications it may be useful to be able to distinguish between stylus contact and finger contact on the touch pad. Although there is no

0 guaranteed way to make this distinction given only the capacitance graph, it is
possible to make a fairly reliable heuristic guess by noting the differences
between stylus input graph 506 and finger input graph 804.

5 The conductive layer on the touch pad surface will expand any grounded
contact by a roughly constant distance which in the preferred embodiment is
comparable to the width of a finger. A stylus tip, which is essentially a point
of negligible size, is expanded to be finger-sized by the conductive layer. A
finger has a finger-sized contact area, which is expanded to a much larger size
by the conductive layer. Thus, a finger can be expected to produce a grounded
10 region of approximately twice the width or diameter as that of a stylus. With
the diameter increased by a factor of two, the total area of grounded contact is
increased by a factor of four. Hence, the system can measure either the total
number of electrodes reporting increased capacitance (the diameter of the
grounded region) or the total summed capacitance among all the electrodes
15 (the area of the grounded region) to guess whether the contact is a stylus or a
finger.

Another useful factor is that a capacitance signal produced by a finger
will tend to fluctuate as the angle of contact of the finger on the surface
20 changes, but a stylus signal will remain very constant. The stylus signal is
independent of the angle at which the stylus is held because the contact area
of the stylus tip itself is negligible. Yet another factor is that the stylus will
produce no signal until contact is made with the surface, whereupon the signal
will jump immediately to full strength, whereas a finger will begin producing a
25 small signal as it approaches the surface since a finger-sized conductor creates
some capacitance merely by proximity to a capacitance sensor.

Figure 12 illustrates a graph of total summed capacitance "Z" versus
time. First, a stylus contact is made which is characterized by a small, steady,
30 sharp Z signal 1201. Then, a finger contact occurs with a larger, more varying
signal 1202 with a smoother rise and fall.

0 In summary, the present invention recognizes, for the first time, that the
application of a conductive layer above the insulating layer of a capacitive
touch pad provides such an input device which works well with both a finger
and a conductive stylus. In addition, it is noted that the size of the stylus tip
can be made as small as desired without impacting the ability of the touch pad
5 to accurately determine its location.

0 We claim:

1. A touch pad module to implement user input functions to an electronic device, said touch pad module comprising a sensor layer having a length and width for detecting position of a conductive object in contact with said touch pad module, an insulative layer positioned over and contiguous with said sensor layer and a conductive layer positioned over and contiguous with said insulative layer.

2. The touch pad module of claim 1 wherein said sensor layer comprises a capacitive touch pad comprising perpendicular rows of electrodes separated by a thin dielectric layer.

3. The touch pad module of claim 2 wherein said conductive object comprises either a finger of a user or a tip of a stylus applied to the surface of said conductive layer.

4. The touch pad module of claim 1 wherein said conductive layer is deformable to said conductive object so that contact of said conductive object to said conductive layer results in a visible trail being created on the surface of the conductive layer.

5. The touch pad module of claim 4 wherein said visible trail is erasable.

6. The touch pad module of claim 1 wherein said conductive layer is transparent.

7. The touch pad module of claim 6 wherein said module further comprises a layer of liquid crystal material which displays a visible change in response to contact of said conductive object.

8. The touch pad module of claim 3 wherein said touch pad module when used in conjunction with said electronic device can analyze capacitive

0 measurements emanated from said module to enable said device to distinguish
finger and stylus contact with said conductive layer.

5 9. The touch pad module of claim 1 wherein said conductive layer is of a
resistance as to expand a small contact area of a tip of a conductive stylus into
an image of suitable size for position measurement.

10 10. The touch pad module of claim 1 wherein said conductive layer
comprises a sheet of plastic embedded with conductive carbon.

11. The touch pad module of claim 1 wherein the resistance of said
conductive layer is such as to enable said module to generate an approximately
equal capacitance when a finger or a conductive stylus tip is brought into
contact with said conductive layer.

15 12. The touch pad module of claim 1 wherein a bezel is located over said
conductive layer preventing said conductive object from contacting that portion
of said touch pad module masked by said bezel.

ABSTRACT OF THE DISCLOSURE

A touch pad module to implement user input functions to an electronic device. The touch pad module includes a sensor layer which, when used in conjunction with an insulative layer and contiguous conductive layer enable the touch pad module to sense both finger and stylus input data to the electronic device.

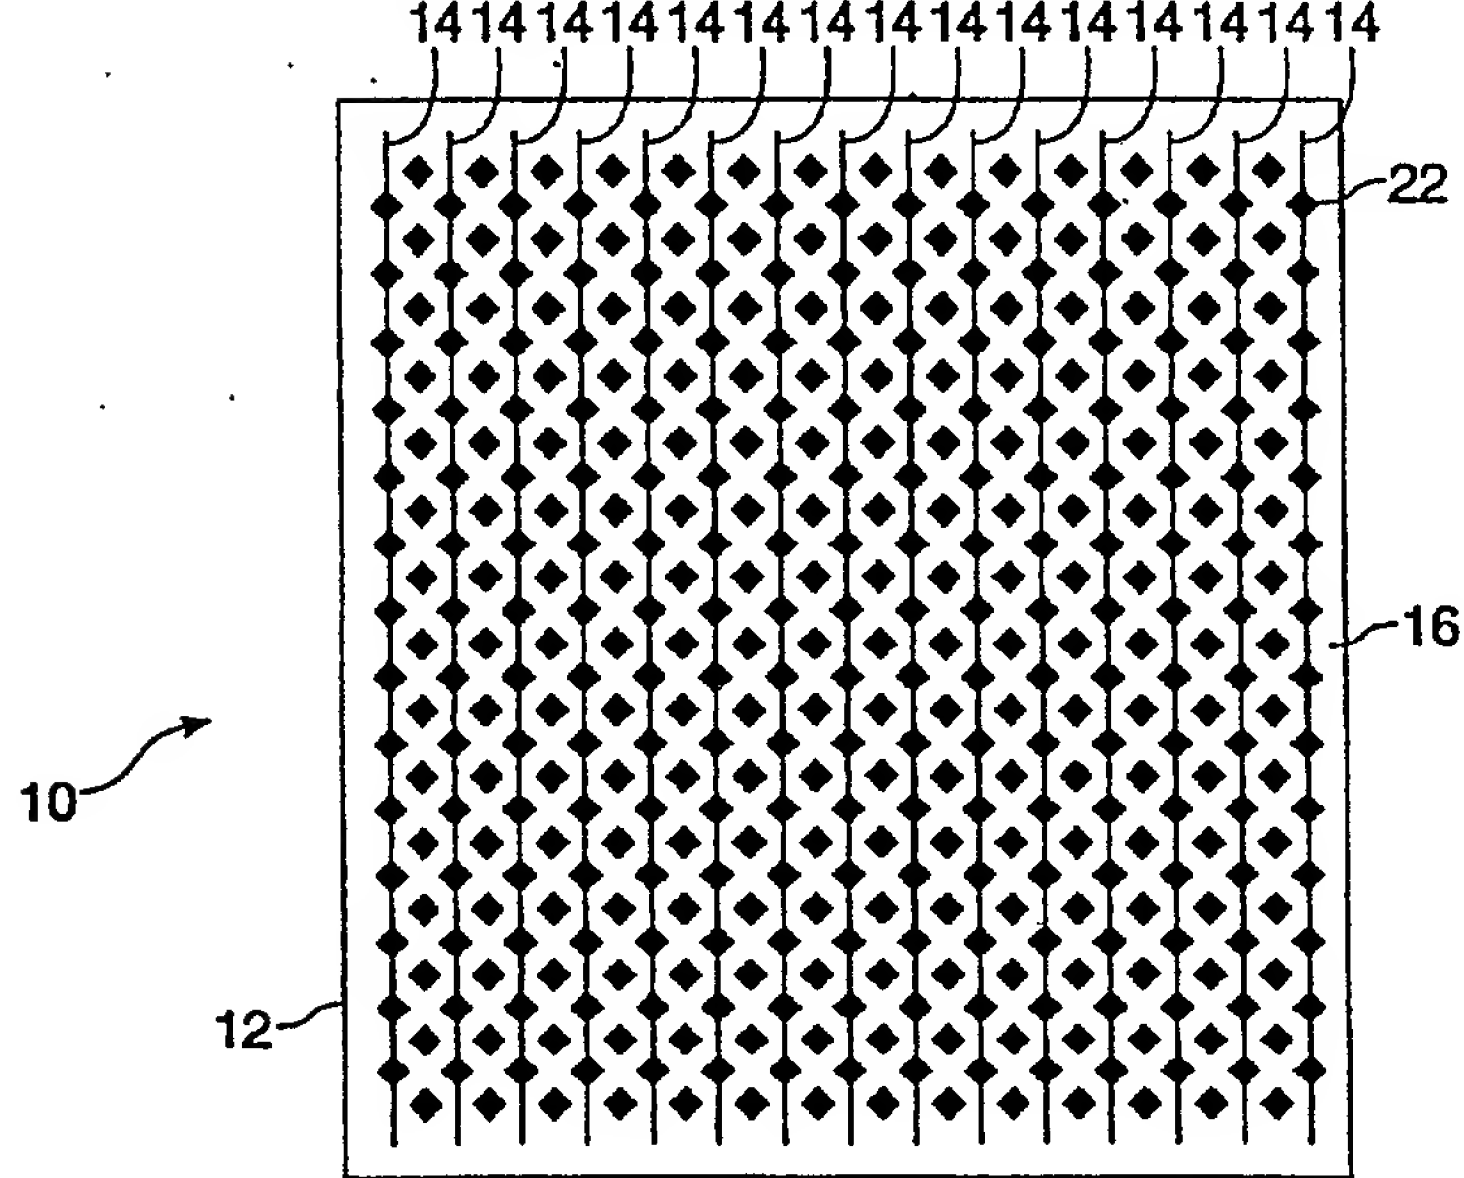


FIG. 1A

(PRIOR ART)

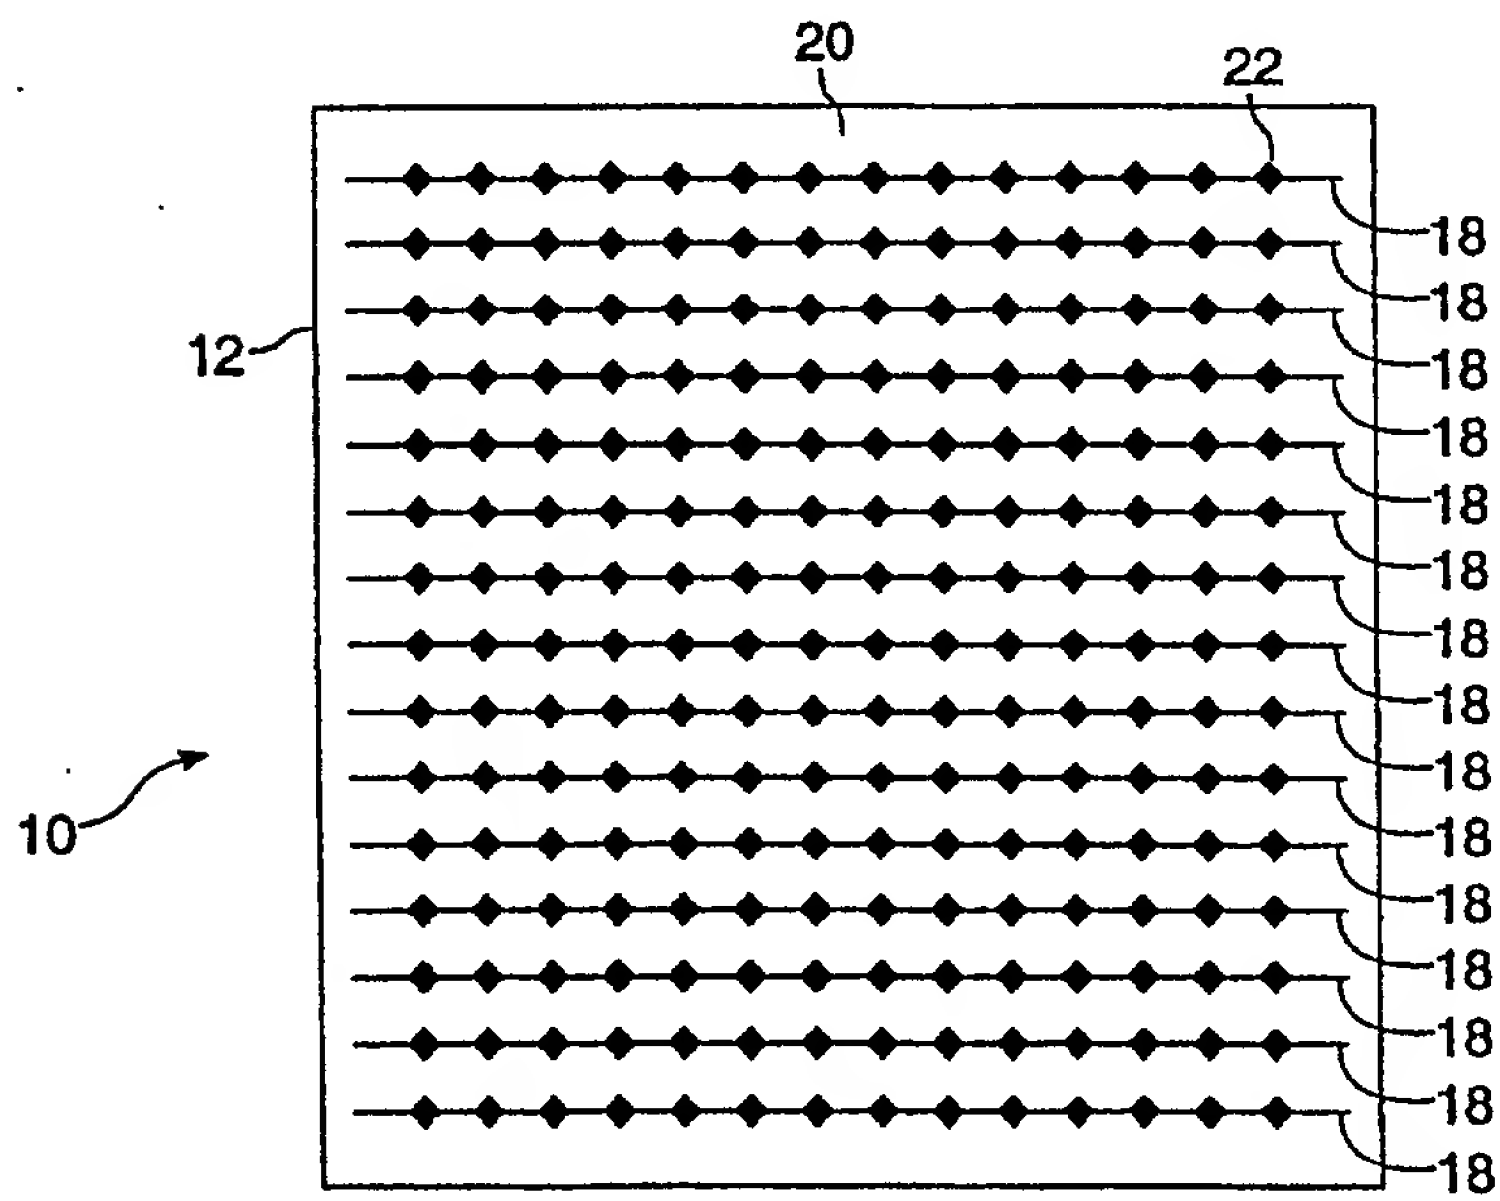


FIG. 1B

(PRIOR ART)

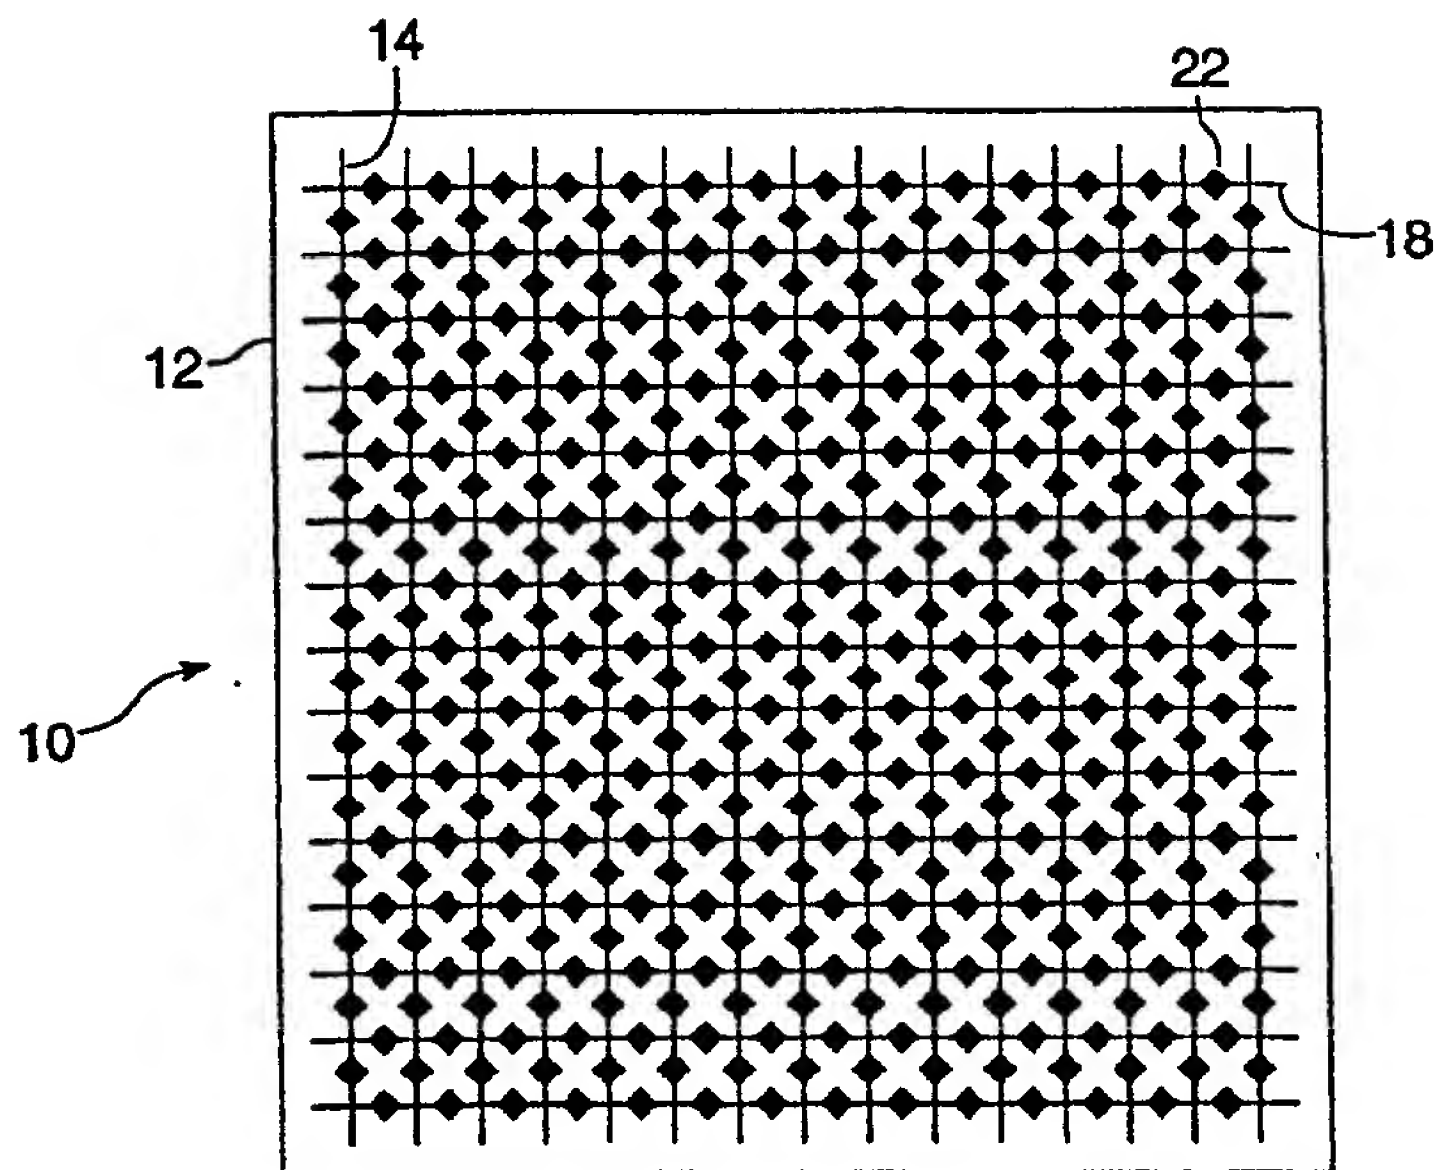


FIG. 1C

(PRIOR ART)

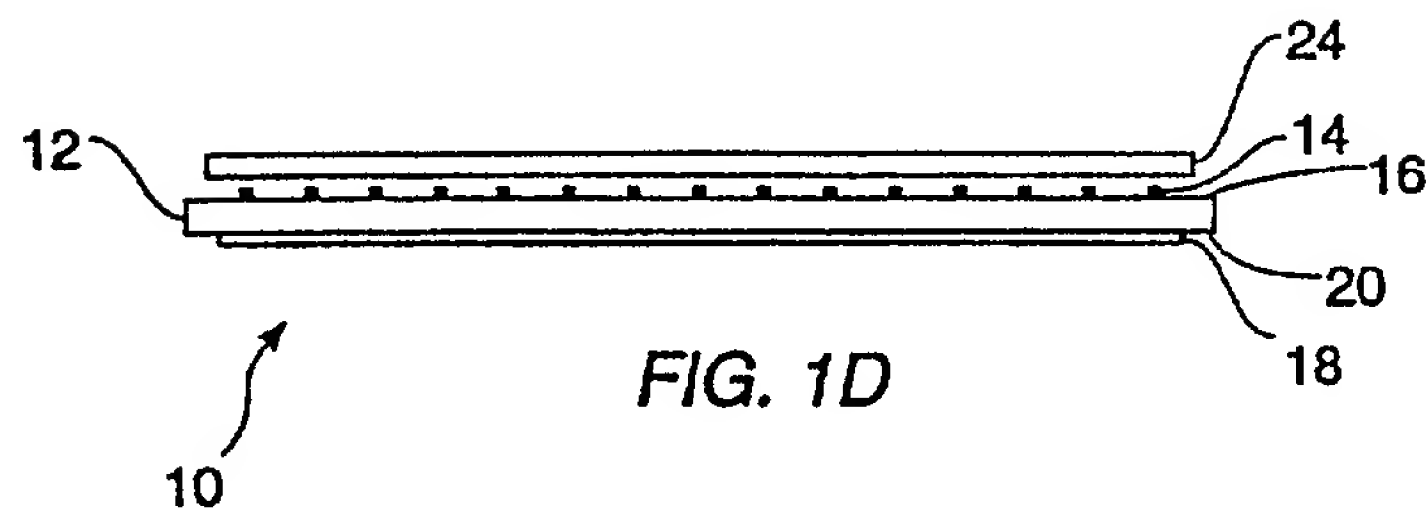


FIG. 1D

(PRIOR ART)


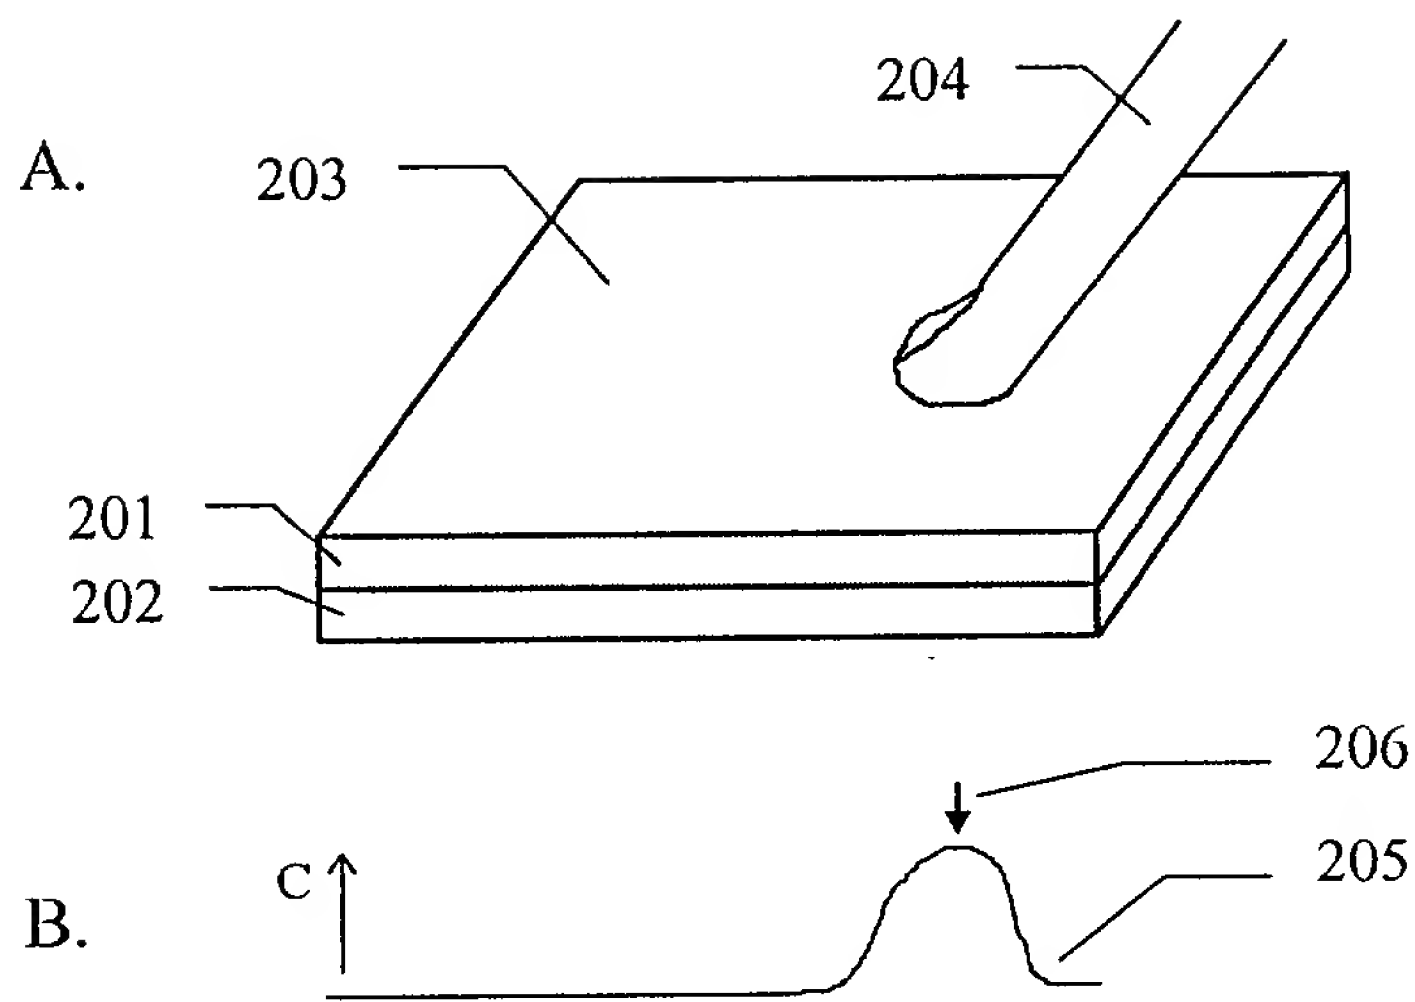


Figure 2. Detecting a finger on an insulating layer over the electrodes.

(Prior Art)

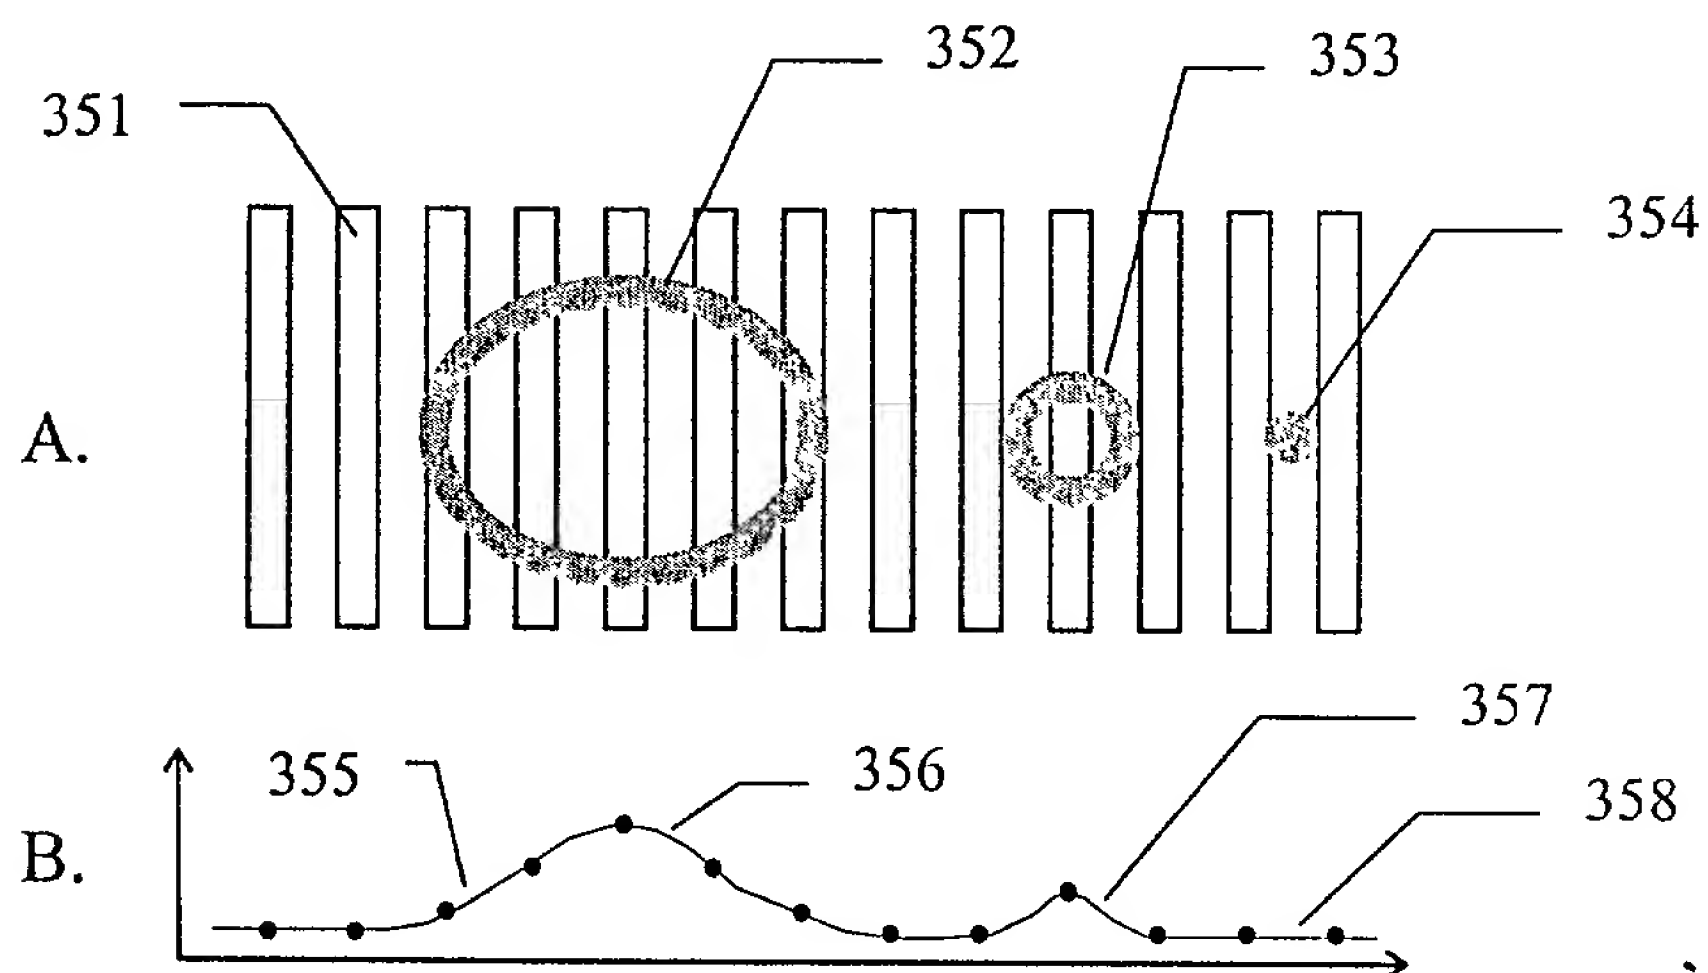

(prior Art)

Figure 3. Measurement of finger capacitance in one dimension.

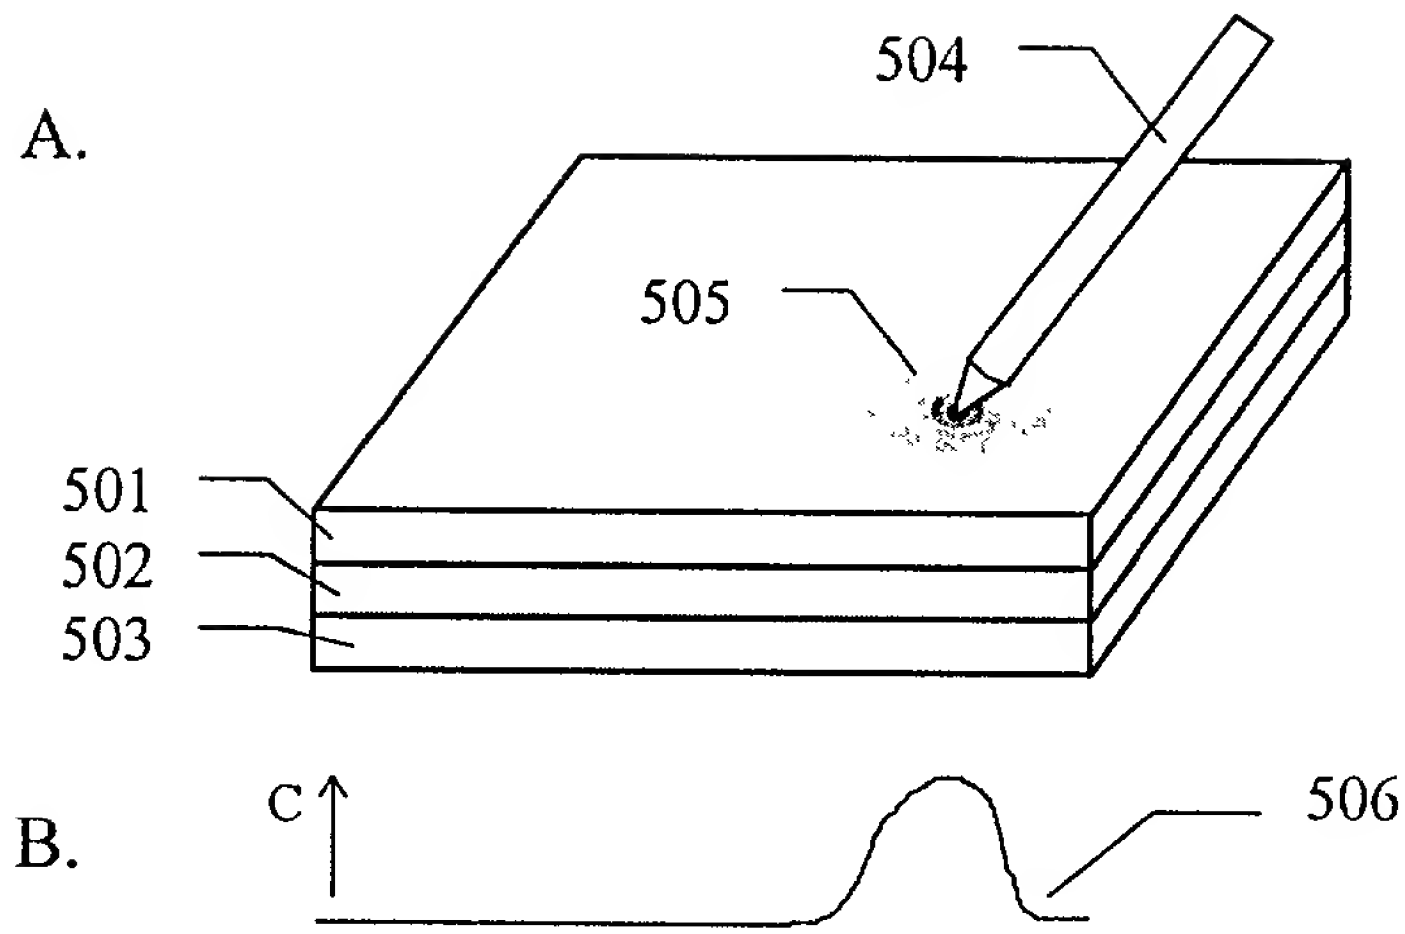


Figure 6. Capacitive touch pad with additional conductive layer providing sufficient signal with stylus.

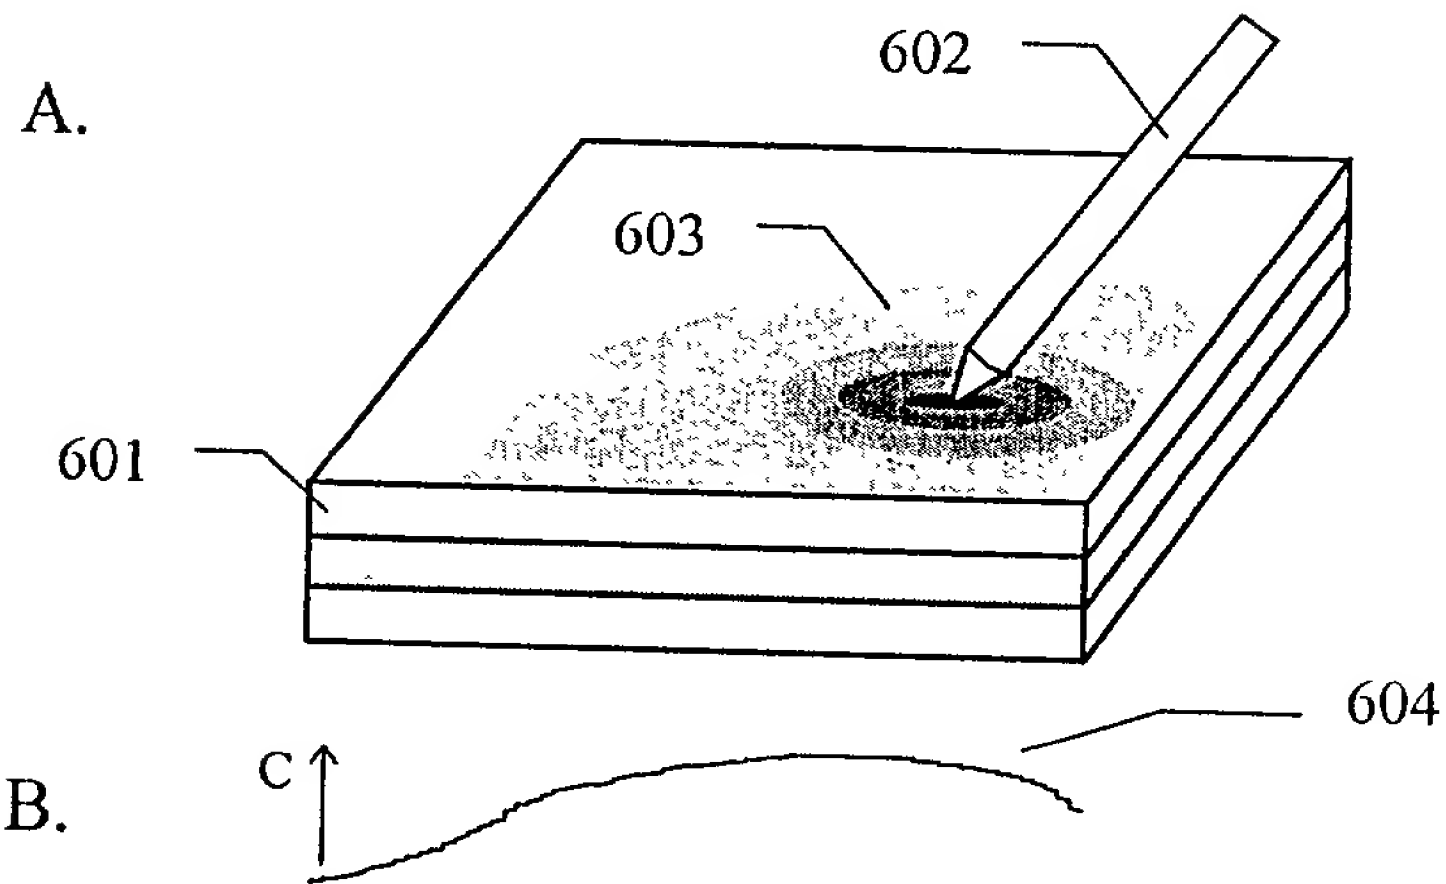


Figure 7. Additional conductive layer with conductance too high.

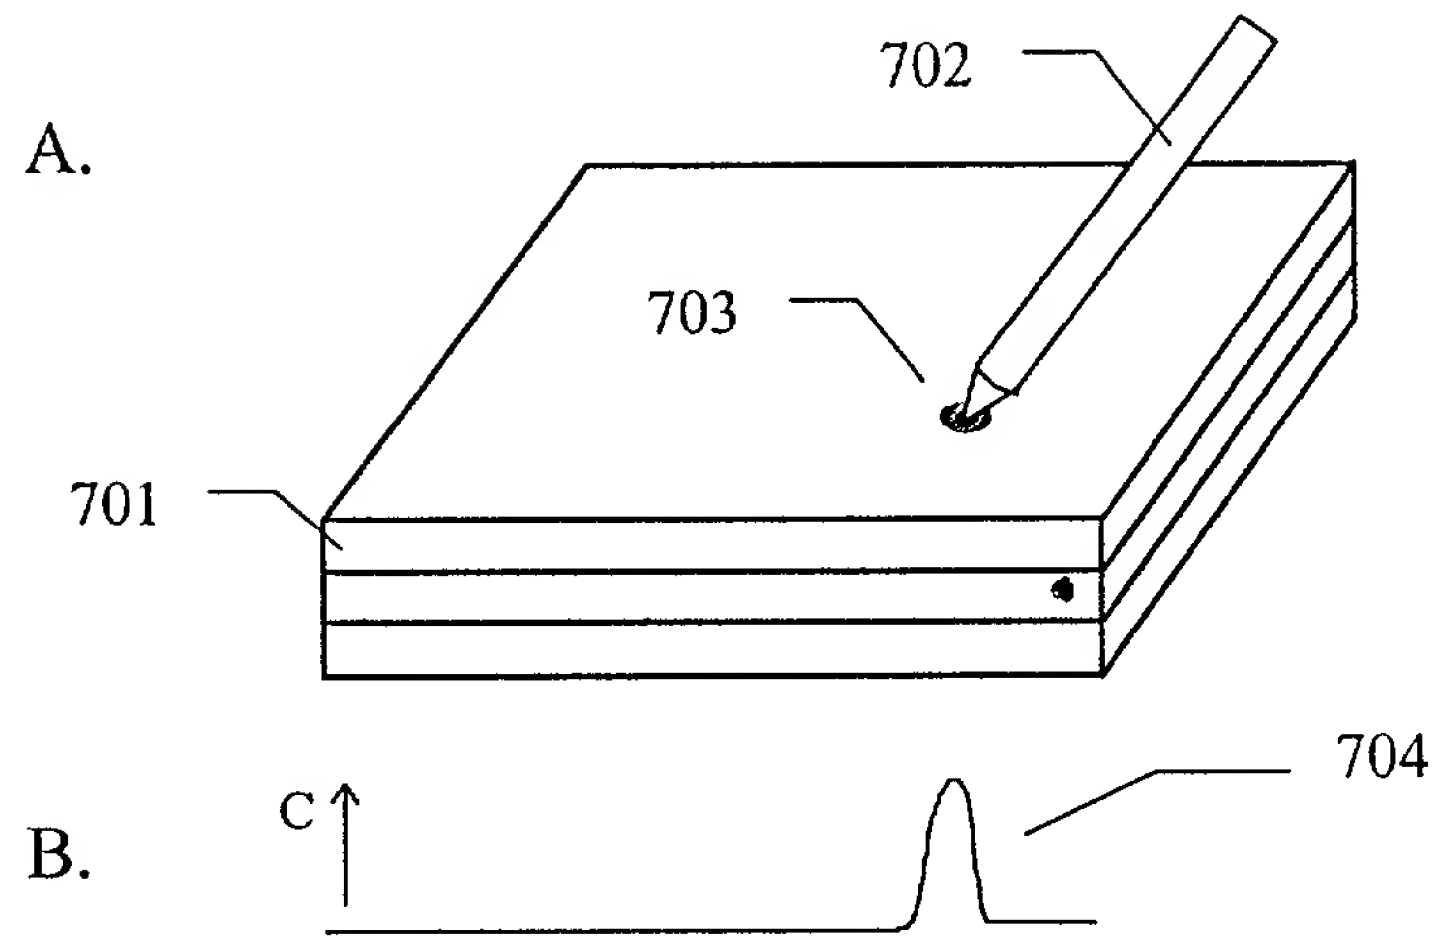


Figure 8. Additional conductive layer with conductance too low.

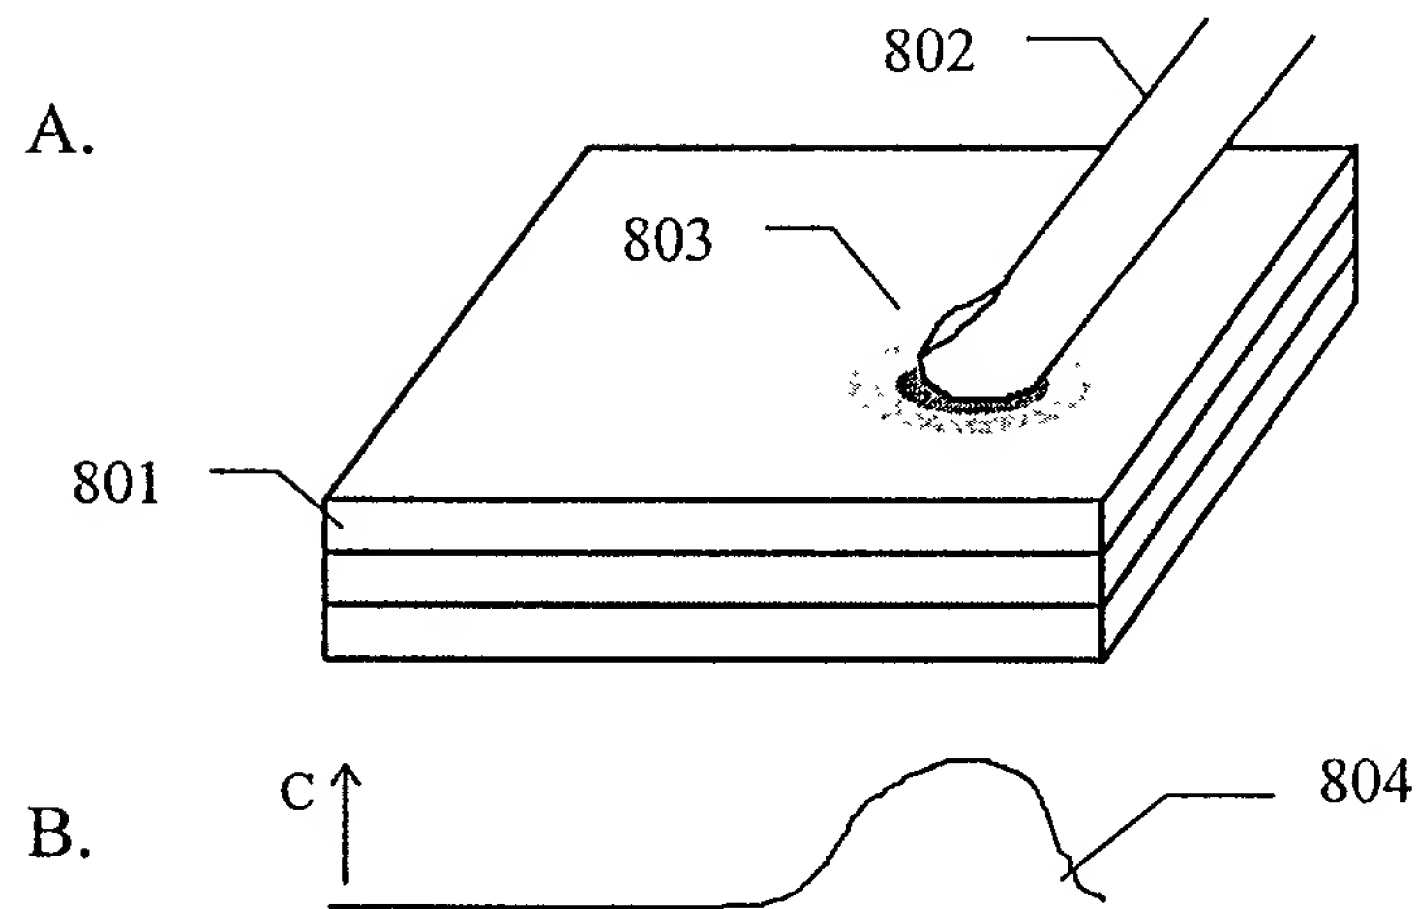


Figure 9. Capacitive touch pad with additional conductive layer providing sufficient signal with finger.

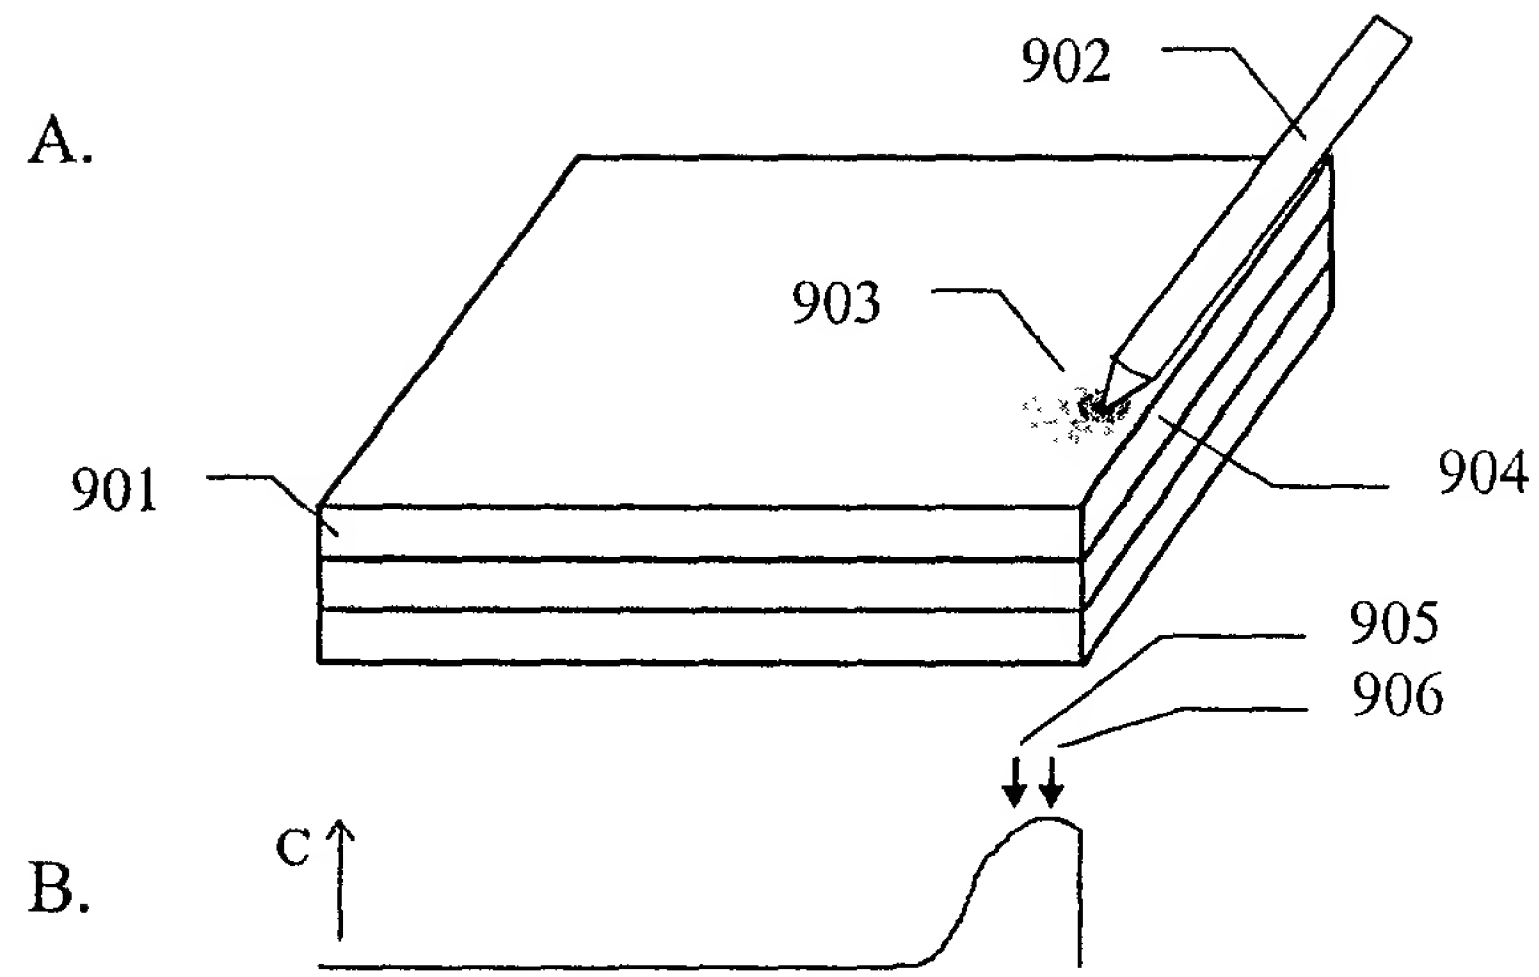


Figure 10. Distortion in position measurement near edge of sensor.

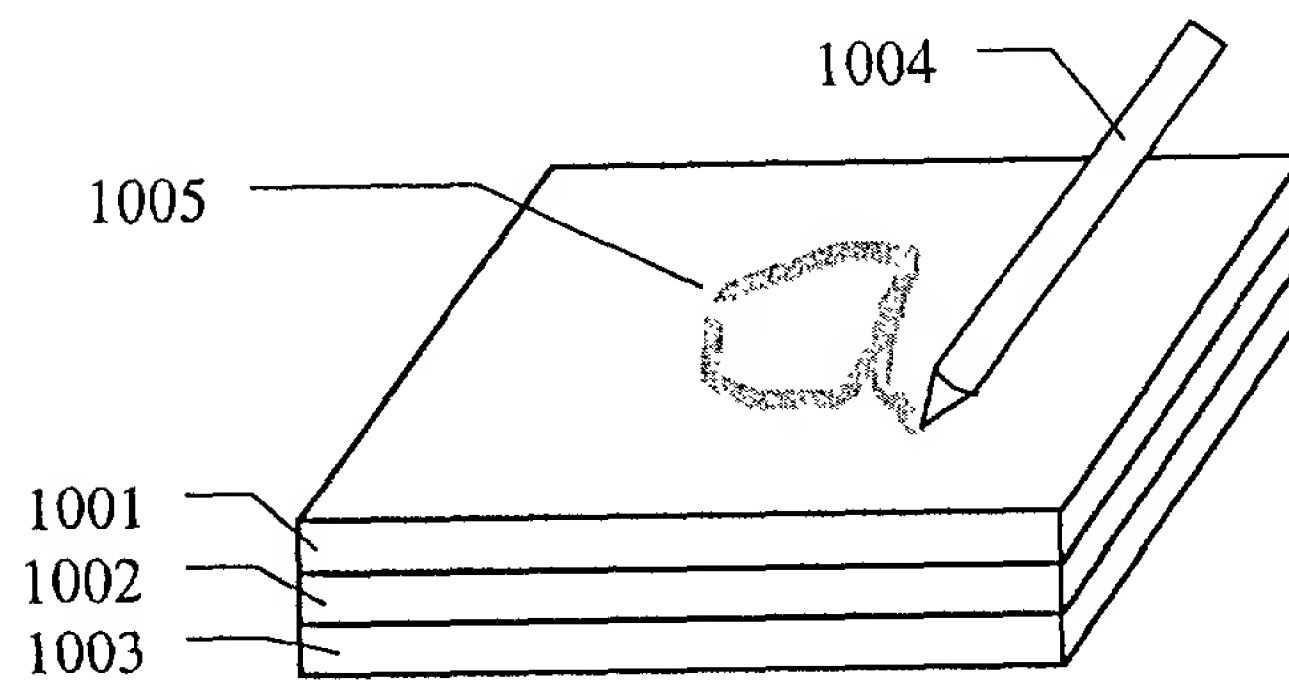


Figure 11. Providing visual feedback.

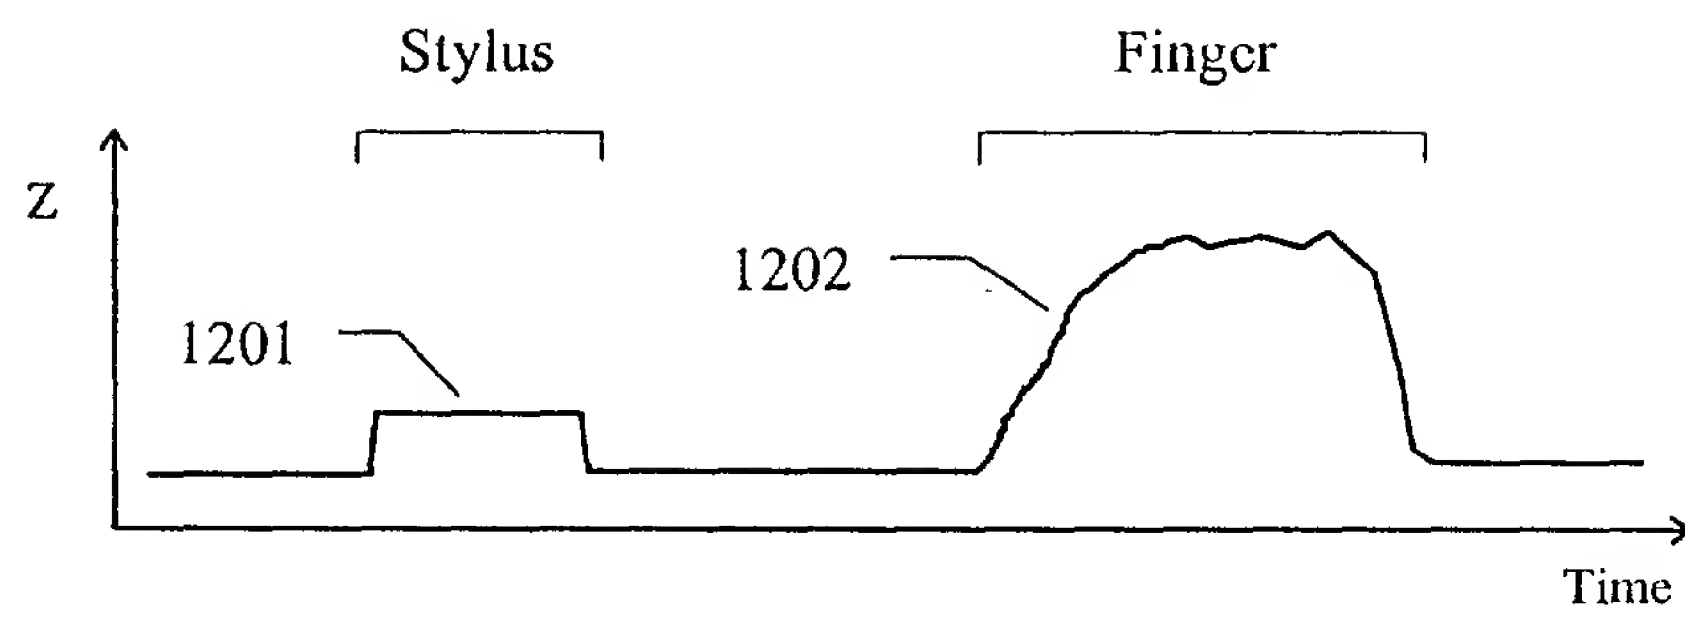


Figure 12. Distinguishing stylus and finger input.

**COMBINED DECLARATION FOR PATENT APPLICATION
AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled FINGER/STYLUS TOUCH PAD, the specification of which (check one) X is attached hereto or was filed on as Application Serial No. and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	<u>Priority Claimed</u>	
	<u>Yes</u>	<u>No</u>

Number	Country	Day/Month/Year Filed

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Ser. No.	Filing Date	Status: Patented, Pending, Abandoned

I HEREBY APPOINT THE FOLLOWING AS MY ATTORNEYS WITH FULL POWER OF SUBSTITUTION TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT OFFICE CONNECTED THEREWITH: Malcolm B. Wittenberg, Registration No. 27,028, Philip M. Shaw, Jr., Registration No. 25,376, J. William Wigert, Jr., Registration No. 24,582, Nathan P. Koenig, Registration No. 38,210, Adam H. Tachner, Registration No. 40,343, and Vincent E. Duffy, Registration No. 39,964.

Send correspondence to: Malcolm B. Wittenberg, Esq.
Crosby, Heafey, Roach & May
Four Embarcadero Center, 19th Floor
P.O. Box 7936
San Francisco, CA 94120
Telephone: (415) 543-8700
Facsimile: (415) 391-8269

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Richard Robert Schediwy

Inventor's signature _____

Date

Residence _____

Citizenship _____

Post Office Address _____

Full name of second joint inventor, if any, Federico Faggin

Inventor's signature _____

Date

Residence _____

Citizenship _____

Post Office Address _____